

ADVANCED

# SPIROLAB<sup>TM</sup>

Desktop, Stand-alone and  
PC-based Spirometer,  
with Oximetry Option

All-in-one Spirometer with 7" display,  
Embedded Printer and Oximetry option,  
to carry on the go



# MAIN features



## REAL-TIME TEST

**Spirometry:** FVC, VC, IVC, MVV, PRE/POST Bronchodilator comparison  
**Oximetry** (optional): Spot test (SpO2%, Pulse BPM)



## CARRY EVERYWHERE

7" LCD Color Touchscreen Display, Long-lasting rechargeable battery, massive Internal Storage



## COMPLIANCE ATS/ERS 2019

And other Standards including ISO 26782 (for Spirometry), ISO 23747 (for PEF), ISO 80601-2-61 (for Oximetry), and more. CE0476, FDA 510 (k)





## PC CONNECTION AVAILABLE

Real-time test on PC screen, connect with your EHR/EMR, back-up internal memory and more, via USB and Bluetooth



## CALIBRATION SOFTWARE

Available on device, with printable calibration report (no separate software required)

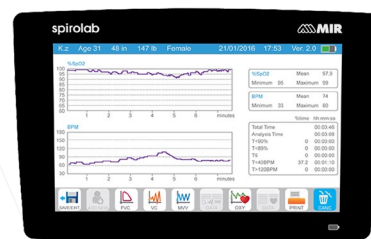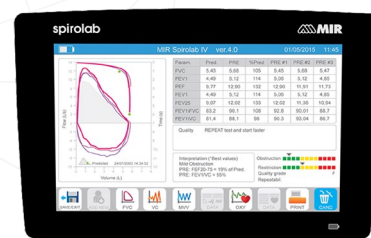

# DISTINCTIVE features



## PREDICTED SETS & VALUES

Large Selection, including GLI, comparison %Pred, Z-score and LLN



## PRINTED EMBEDDED

Thermal printer. Paper size 112mm. Direct external print also available via PC software



## PEDIATRIC INCENTIVE

Real-time animation on display to improve patient compliance during the test



## COVID-19 PREVENTION

Complete Disposable Set with Antiviral filter. Bluetooth connection to test at safety distance


# Always INCLUDED

- ✦ Carrying case
- ✦ Power supply/battery charger
- ✦ USB cable
- ✦ 1 Roll of thermal printer paper
- ✦ Noseclip
- ✦ PC Software license
- With Oximetry Option:
  - ✦ Finger Probe



# Compatible SOFTWARE

winspiroPRO

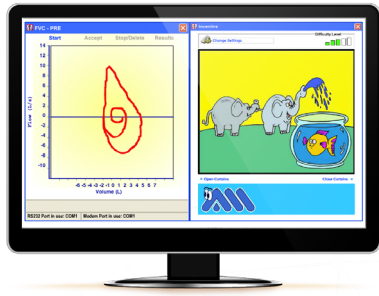

**Pediatric Incentive** (PATENTED) to improve patient compliance during the test.

Acceptability Messages, Test interpretation and Quality Control Grade according to the latest **Spirometry Standards**

## MAIN FEATURES

Windows-based solution for Spirometry, Oximetry and Telemedicine.


Wide range of predicted sets and values, including **GLI Predicted sets, LLN and Z-score.**

Embedded **EHR/EMR connectivity.**


**NET VERSION** available, share one database between different PC workstations.

## MEDICAL REPORT

Specialized and **customizable printout**

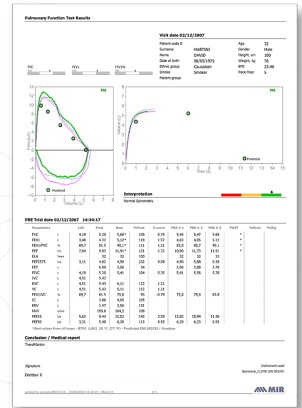

spiro Connect

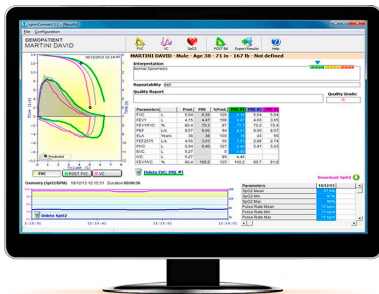

## MAIN FEATURES

Windows-based solution, **direct integration** with your EHR/EMR.

Real time test include **Spirometry and Oximetry** Standardized communication in **HL7 or Exchange Protocol.**

Select patient info directly from your own **EHR/EMR**

**Spirometry test:** FVC-Pre, FVC-Post, VC-Pre  
**Oximetry Test:** SpO2 (%), Pulse (BPM)

## GO-TO-MARKET TOOLKIT

Software Development Kit available for System Integrators and App Developers.  
OEM service available for Spirometry and Oximetry.



Learn more about available SDK and OEM



# Compatible TURBINES

**flowMIR™**  
Disposable Turbine



**Reusable Turbine**



Mouthpiece

Included Disposable

Required, Not Included

Turbine Disinfection

Not required

Required

Turbine Calibration

Not required

Required

Packaging

Individually sealed: 60 or 10 units / box

1 unit in Carton box

Antiviral Filter

Available Disposable

Required Disposable

PLAY VIDEO



SCIENTIFIC PUBLICATIONS



# TECHNICAL datasheet

## PRODUCT CODES - Spirolab Configurations

911080E0 – Spirometer • 911080E1 - Spirometer with reusable turbine

911081E0 - Spirometer + Oximeter • 911081E1 - Spirometer + Oximeter with reusable turbine

### Technical specification

<b>Width</b>	220 mm
<b>Length</b>	210 mm
<b>Thickness</b>	51 mm
<b>Weight</b>	1450 g (battery pack included)

### Sensors



miniflowmeter (code 900595)  
for reusable and disposable turbine  
dimension (∅ 30 mm, 42 mm)

Reusable soft, adult, MIR sensor for  
oximetry tests (code 919024) only  
spirolab code 911081

### Power supply

power

**Current capacity**

**Consumption**

**Backup battery voltage**

**Batteries charger**

Rechargeable battery and mains  
Ni-MH, 6 elements

4500 mAh

average 250 mA

none

Output voltage=12 V, current=1A,  
compliant with EN 60601-1

~10 hours

### Autonomy

**Connectivity**

**Display**

Display

**Keyboard**

**Mouthpieces**

**Type of electrical**

**Protection**

**Safety level for shock hazard**

**Conditions of use**

USB 2.0, Bluetooth® 2.1

7 inch colour touch screen LCD

with 800x480 resolution

absent, touchscreen

∅ 30 mm (1.18 inch)

Internally powered

Class II while charging battery

Type BF Apparatus

Apparatus for continuous use

### Storage conditions

Temperature: MIN -40 °C,  
MAX +70 °C  
Humidity: MIN 10% RH;  
MAX 95%RH

### Transport conditions

Temperature: MIN -40 °C,  
MAX +70 °C  
Humidity: MIN 10% RH;  
MAX 95%RH

### Operating conditions

Temperature: MIN + 10 °C,  
MAX + 40 °C  
Humidity: MIN 10% RH,  
MAX 95%RH

### Applied norms

Electrical Safety EN 60601-1  
Electro Magnetic Compatibility  
EN 60601-1-2

### Degree of protection

**against water penetration**

IPX1 appliance protected against  
water leaks

### Codes and equipments

<b>911080E0</b>	spiro
<b>911080E1</b>	spiro with reusable turbine
<b>911080E2</b>	spiro with 120 FlowMir
<b>911081E0</b>	spiro+oxy
<b>911081E1</b>	spiro+oxy with reusable turbine
<b>911081E2</b>	spiro+oxy with 120 FlowMir

### Spirometry

<b>Flow sensor</b>	bi-directional digital turbine
<b>Volume rate</b>	10 L
<b>Flow range</b>	±16L/s
<b>Volume accuracy</b>	±2.5% or 50 mL
<b>Flow accuracy</b>	±5% or 200 mL/s
<b>Dynamic resistance</b>	<0.5 cm H <sub>2</sub> O/L/s
<b>Temperature sensor</b>	semiconductor (0-45°C)
<b>Test available</b>	FVC, VC, IVC, MVV, PRE-POST FVC, FEV1, FEV1/FVC%, FEV1/PEF, FEV1/VC, FEV1/FEF0.5, DTPEF, FEV FEV0.5/FVC, FEV0.75, FEV0.75/FVC, FEV2, FEV2/FVC, FEV3, FEV3/FVC, FEV1/FEV6, PEF, FEF25, FEF50, FEF2575, FEF7585, FET, Vext, ELA, FIVC, FIV1, PIF, FIV1/FIVC, FIF25, FIF75, R50, MVVcal, PIF, IRV, VC, IVC, IC, ERV, IRV, FEV1/VC, TV, VE, te, ti/t-tot, TV/ti, MVV
<b>Measured parameters</b>	Up to 10000 tests

### Oximetry (on request)

<b>Measurement method</b>	Red and infrared absorption
<b>SpO2 range</b>	0-99%
<b>SpO2 accuracy</b>	± 2% between 70-99% SpO2
<b>Average number of heart beats for the %SpO2 calculation</b>	8 beats
<b>Pulse Rate range</b>	18-300 BPM
<b>Pulse Rate accuracy</b>	± 2BPM or 2% whichever is greater
<b>Average interval for the calculation of cardiac pulse</b>	8 seconds
<b>Signal quality indication</b>	0 - 8 segments on display
<b>Test available</b>	spot
<b>Measured parameters</b>	SpO2% min, max, average BPM min, max, average Test duration % Bradycardia Duration (<40 BPM) % Tachycardia Duration (>120 BPM) % of Time with SpO2 ≤ 90% (T90%, T89%), T5
<b>Memory capacity</b>	about 500 hours oximetry

### Certificates & Registrations

<b>CE 0476</b>	MED 9826
<b>FDA 510 (k)</b>	K 052140
<b>Health Canada</b>	71191 (class II)
<b>CND code</b>	Z12150102 (spiro) Z1203020408 (spiro + oxy) 46906 (spiro), 45607 (spiro + oxy)
<b>GMDN code</b>	1272475/R (spiro)
<b>Ministry of Health</b>	1272476/R (spiro + oxy) 1645455/R (spiro)

## ITALY

MIR Head Office  
Via del Magliolino, 125  
00155 Roma  
Tel. +39 06 22 754 777  
Fax +39 06 22 754 785  
Mir.spirometry.com

## USA

MIR USA, Inc.  
5462 S. Westridge Drive  
New Berlin, WI 53151  
Phone +1 (262) 565-6797  
Fax +1 (262) 364-2030

## FRANCE

MIR Local Office  
Jardin des Entreprises,  
290, Chemin de Saint Dionisy  
30980 LANGLADE (France)  
Phone +33 (0)4 66 37 20 68  
Fax +33 (0)4 84 25 14 32